

HOIST CRANE



Manufactured by:

 **PT. DAE BAEK MACHINERY**

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530

More Information:

 newproject03@daebaek.co.id

 021 2918 5124

 www.ptdaebaek.com

HOIST CRANE



ISO 14001:2015

ISO 9001:2015

245

SINGLE GIRDER OVER HEAD CRANE



SPECIFICATION

Capacity (ton)	Max Span (m)	Lift L (m)	Speed/Motor (m/Min)			Approx. Dimensions (mm)							Travelling Wheel	Runway Rail (kg/m)																
			Hoisting	Traversing	Travelling	H	A	B	C	E	F	J																		
0.5	9	6 or 12	6/0.6 or 12/1.2	16/0.2 or 24/0.4	24/0.75*2 or 16/0.5*2	705	1940	1500	1100	60	250	650	160	15																
	12						2440	2000	1300																					
	15						2940	2500																						
	18						3440	3000																						
	21						3940	3500																						
24	4440		4000																											
1	9		6/16 or 12/2.4	16/0.5 or 24/0.75		705	815	1940	1500	1100	60	250			700	160	15													
	12							2440	2000	1300																				
	15							2940	2500																					
	18							3440	3000																					
	21							3940	3500																					
24	4440		4000																											
2	9		5/1.8 or 10/3.7	16/0.5 or 24/0.75		705	980	1940	1500	1200	60	250			800			160	15											
	12							2440	2000	1300																				
	15							2940	2500																					
	18	3440			3000																									
	21	3940			3500																									
3	9	4.5/2.8 or 9/5.5	16/0.5 or 24/0.75	705	1115	1940	1500	1100	60	250	800	160	15																	
	12					2440	2000	1200																						
	15					2940	2500																							
	18					3440	3000																							
	5					9	4.2/4.2 or 5.6/5.5							16/0.5 or 24/0.75	705	1325	1940			1500	1100	60	250	800	160	15				
12		2440	2000	1300																										
15		2940	2500																											
10		9	3/6 or 4.5/9		10/0.5*2 or 15/0.75*2	20/1*2 or 30/1.5*2		1520	1940	1500	1200						60			250	900						160	15		
		12							2440	2000	1400																			
	15	2940		2500			1500																							
	10	9		12 or 18 or 24					3/6 or 4.5/9	10/0.5*2 or 15/0.75*2				20/1*2 or 30/1.5*2	1520	1940		1500	1200			60	250	900					315	22
		12														2440		2000	1400											
15		9	12 or 18 or 24		3/6 or 4.5/9	10/0.5*2 or 15/0.75*2		20/1*2 or 30/1.5*2			1520					2440	2000	1400												
		15					2940									2500	1500													

• Specification can be change during Quotation

Manufactured by:

PT. DAE BAEK MACHINERY

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530

More Information:

newproject03@daebaek.co.id

021 2918 5124

www.ptdaebaek.com

HOIST CRANE



DOUBLE GIRDER OVER HEAD CRANE



SPECIFICATION

Capacity (ton)	Max Span (m)	Lift L (m)	Speed/Motor (m/Min)			Approx. Dimensions (mm)							Travelling Wheel	Runway Rail (kg/m)
			Hoisting	Traversing	Travelling	H	A	B	C	E	F	J		
3	11	12	4.5/2.8 or 9/5.5	16/0.5 or 24/0.75*2	16/0.5*2 or 24/0.75*2	420	2440	2000	250	1200	60	950	160	15
	15						3000	2500					200	
	18						3550	3000					250	
	21						4050	3500					250	
	24						4550	4000					250	
5	27		4.2/4.2 or 5.6/5.5	16/0.5 or 24/0.75	20/1*2 or 30/1.5*2	510	5050	4500	350	1700	100	1150	250	22
	15						3050	2500					315	
	18						3550	3000					400	
	21						4050	3500					400	
	24						4600	4000					400	
10	27		3/6 or 4.5/9	10/0.5 or 15/0.75	20/1*2 or 30/1.5*2	750	5100	4500	350	1900	1550	60	400	22
	14.5						5850	5000					315	
	18						3100	2500					400	
	21						3600	3000					400	
	24						4350	3500					400	
15	27	3/6 or 4.5/9	10/1 or 15/1.5	20/1.5*2 or 30/2.2*2	995	5350	4500	400	2300	2300	100	400	30	
	30					5850	5000					630		
	18					3850	3000					630		
	21					4350	3500					630		
	24					4850	4000					630		
20	27	3/8.5 or 4.5/13	10/1.5*2 or 15/2.2*2	20/1.5*2 or 30/2.2*2	1175	5450	4500	400	2300	2000	100	500	37	
	30					6100	5000					630		
	15					3850	3000					630		
	21					4450	3500					630		
	24					4950	4000					630		
30	27	2.8/11.5 or 4.2/17	10/1*2 or 15/1.5*2	20/1*2 or 30/1.5*2	1480	5450	4500	450	2600	2600	200	400	50	
	30					6100	5000					630		
	9.5					4450	3500					630		
	15					5000	4000					630		
	27					5700	4500					630		
50	30	3.2/33	10/1.5*2 or 15/2.2*2	20/2.2*4 or 30/3.7~5.5*4	1680	6300	5000	450	2800	3100	2300	800	37	
	10					5500	2900					800		
	15					5650	3000					800		
	22					5950	3200					800		
	30					5850	3300					800		
70	9	2.4/33	10/1.5*2 or 15/2.2*2	30/3.7~5.5*4	1780	6000	3400	450	2900	3200	2800	500*8	50	
	15					6300	3600					500*8		
	22					6450	3700					500*8		
	30					6450	3700					500*8		
	30					6450	3700					500*8		

* Specification can be change during Quotation

Manufactured by:

PT. DAE BAEK MACHINERY

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530

More Information:

newproject03@daebaek.co.id

021 2918 5124

www.ptdaebaek.com

HOIST CRANE



DOUBLE GANTRY CRANE



SPECIFICATION

Capacity (ton)	Max Span (m)	Lift L (m)	Speed/Motor (m/Min)			Approx. Dimensions (mm)				Travelling Wheel	Runway Rail (kg/m)		
			Hoisting	Traversing	Travelling	H	R	A	B				
3	15	12	4.5/2.8 or 9/5.5	16/0.5 or 24/0.75	20/1*2 or 30/1.5*2	420	950	4000 ~ 5000	4500 ~ 5500	250	22 30		
	17.5												
	20												
5	10		4.2/4.2 or 5.6/5.5	10/0.5 or 15/0.75		20/1*2 or 30/1.5*2	510	1150	3500 ~ 4050			4600 ~ 5600	315
	12.5												
	15												
10	17.5		3/6 or 4.5/9	10/0.5 or 15/0.75	20/1*2 or 30/1.5*2	750	1150	4000 ~ 5000	4850 ~ 5850	400			
	20												
	10												
15	12.5		3/8.5 or 4.5/13	10/1*2 or 15/15*2	20/1*2 or 30/2.2*2	995	1200	4000 ~ 6000	4950 ~ 6950	500 630			
	15												
	17.5												
20	10	2.8/11.5 or 2.8/17	10/1*2 or 15/15*2	20/2.2*2 or 30/3.7*2	1175	1300	4000 ~ 6000	5100 ~ 7100	630 710 800				
	12.5												
	17.5												
30	20	3/8.5 or 4.5/13	10/1*2 or 15/15*2	20/2.2*2 or 30/3.7*2	1480	1800	4000 ~ 6000	5200 ~ 7200	630 710 800				
	10												
	12.5												
50	15	3.2/33	10/1*2 or 15/15*2	20/2.2*4 or 30/3.7~5.5*4	1680	2300	6000 ~ 7000	9000 ~ 10000	500*8 630*8 710*8				
	28												
	30												
70	9	2.4/33	10/1.5*2 or 15/2.2*2	20/2.2*4 or 30/3.7~5.5*4	1780	2800	6000 ~ 7000	9000 ~ 10000	500*8 630*8 710*8				
	14												
	20												
	25												
	30												

* Specification can be change during Quotation

Manufactured by:

PT. DAE BAEK MACHINERY

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530

More Information:



newproject03@daebaek.co.id



021 2918 5124



www.ptdaebaek.com

HOIST CRANE



GANTRY CRANE



SPECIFICATION

Capacity (ton)	Max Span (m)	Lift L (m)	Speed/Motor (m/Min)			Approx. Dimensions (mm)				Travelling Wheel	Runway Rail (kg/m)	
			Hoisting	Traversing	Travelling	H	R	A	B			
3	15	12	4.5/2.8 or 9/5.5	16/0.5 or 24/0.75	20/1*2 or 30/1.5*2	420	950	4000 ~ 5000	4500 ~ 5500	250	22 30	
	17.5											
	20											
5	10		4.2/4.2 or 5.6/5.5	10/0.5 or 15/0.75	20/1*2 or 30/1.5*2	510	1150	3500 ~ 4050	4600 ~ 5600	315		30 37
	12.5											
	15											
10	17.5		3/6 or 4.5/9	10/1*2 or 15/15*2	20/1*2 or 30/2.2*2	750	1150	4000 ~ 5000	4850 ~ 5850	400	30 37	
	20											
	10											
15	12.5		2.8/11.5 or 2.8/17	10/1*2 or 15/15*2	20/2.2*2 or 30/3.7*2	995	1200	4000 ~ 6000	4950 ~ 6950	500 630	30 37	
	15											
	17.5											
20	20	3/8.5 or 4.5/13	10/1*2 or 15/15*2	20/2.2*2 or 30/3.7*2	1175	1300	4000 ~ 6000	5100 ~ 7100	630 710 800	30 37		
	10											
	12.5											
30	15	3.2/33	10/1*2 or 15/15*2	20/2.2*4 or 30/3.7~5.5*4	1480	1800	4000 ~ 6000	5200 ~ 7200	500*8 630*8 710*8	50		
	17.5											
	20											
50	9	2.4/33	10/1.5*2 or 15/2.2*2	30/3.7~5.5*4	1680	2300	6000 ~ 7000	9000 ~ 10000	500*8 630*8 710*8	73		
	13											
	28											
70	30	2.4/33	10/1.5*2 or 15/2.2*2	30/3.7~5.5*4	1780	2800	6000 ~ 7000	9000 ~ 10000	500*8 630*8 710*8	73		
	9											
	14											
70	20	2.4/33	10/1.5*2 or 15/2.2*2	30/3.7~5.5*4	1780	2800	6000 ~ 7000	9000 ~ 10000	500*8 630*8 710*8	73		
	25											
	30											

• Specification can be change during Quotation

Manufactured by:

PT. DAE BAEK MACHINERY

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530

More Information:



newproject03@daebaek.co.id



021 2918 5124



www.ptdaebaek.com

HOIST CRANE



JIB CRANE



SPECIFICATION

1. Wall-Mounted Slewing Jibs

Capacity		1/2ton~3ton
Working Area	Min	0.8m
	Max	6m
Traversing Speed		16m/min
Slewing	Speed	Manual
	Angle	180°

2. Wall-Travelling Jibs

Capacity	1/2ton~10ton
Length of Arm	Max 6m
Traversing Speed	16m/min
Travelling Speed	16m/min

• Specification can be change during Quotation



3. Pillar-Mounted Slewing Jibs (A)

Capacity		1/2ton~3ton
Working Area	Min	0.8m
	Max	3m
Traversing Speed		16m/min
Slewing	Speed	Manual
	Angle	360°
Height of Post		Max 6m

4. Pillar-Mounted Slewing Jibs (B)

Capacity		1/2ton~2ton
Working Area	Min	0.8m
	Max	6m
Traversing Speed		16m/min
Slewing	Speed	0.5rpm
	Angle	360°
Height of Post		Max 6m

• Specification can be change during Quotation

Manufactured by:

 **PT. DAE BAEK MACHINERY**

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530

More Information:

 newproject03@daebaek.co.id

 021 2918 5124

 www.ptdaebaek.com

HOIST



Explosion-proof hoist



Explosion-proof hoist

LGM LGM HOIST

반도 호이스트크레인
BANDO CRANES



Regular Type



Wire Rope Hoist



Ex-proof Hoist



Double-Rail Type



Chain Hoist



i-LIFTER



CI-LIFTER



CEO HOIST



Main & Aux. Type

Manufactured by:

 **PT. DAE BAEK MACHINERY**

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530


More Information:

 newproject03@daebaek.co.id

 021 2918 5124

 www.ptdaebaek.com

Address & Location

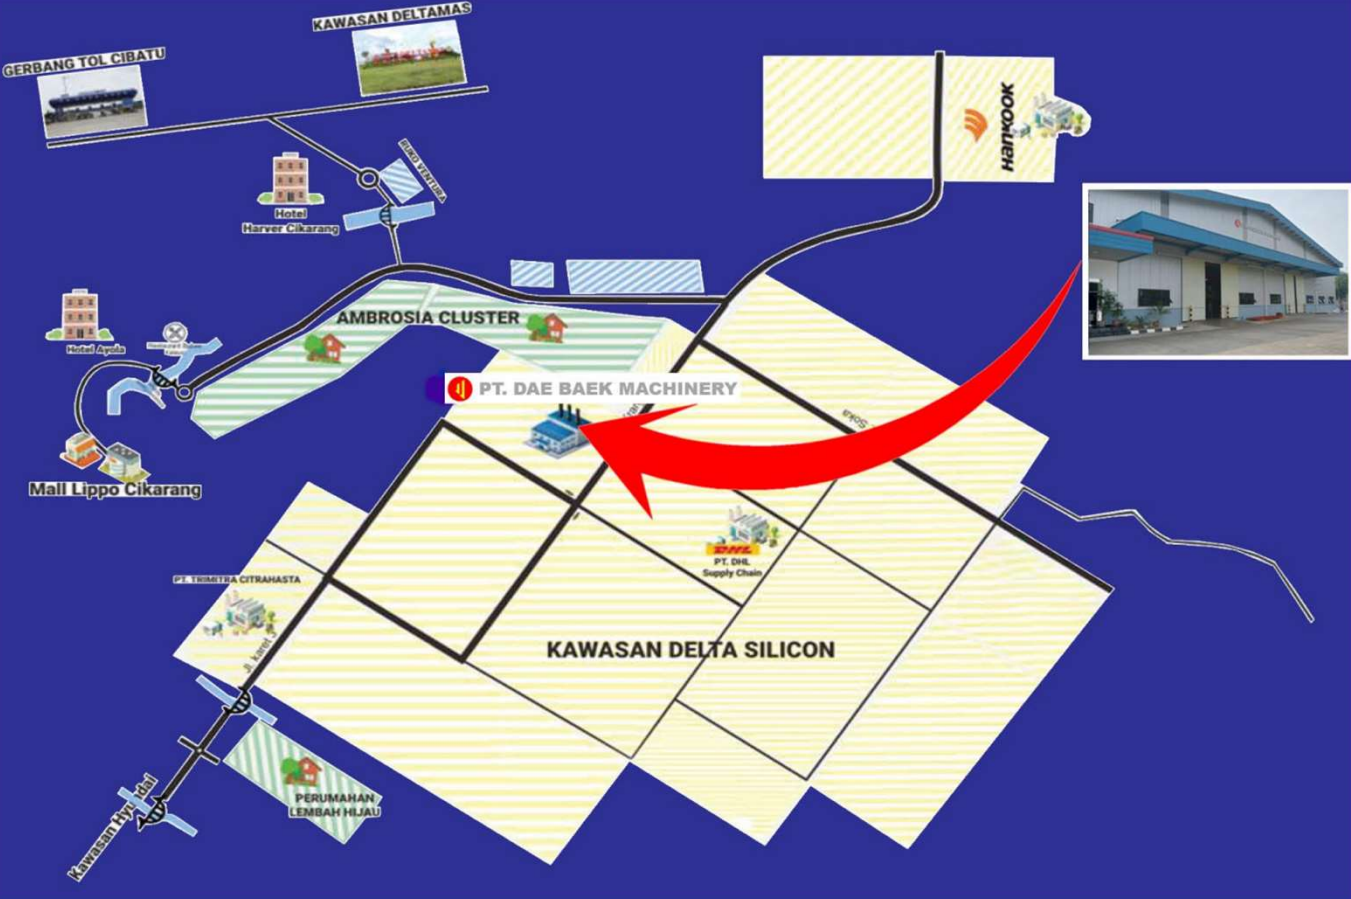

 **PT. DAE BAEK MACHINERY**

Jl. Beringin Plot F12/05 Delta Silicon II
Cibatu, Cikarang Selatan, Bekasi 17530